
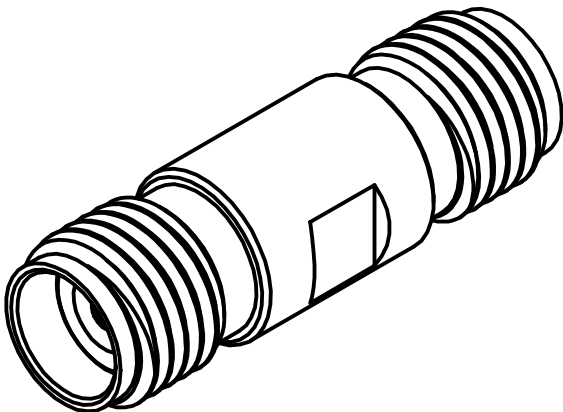


PRODUCT DATA SHEET

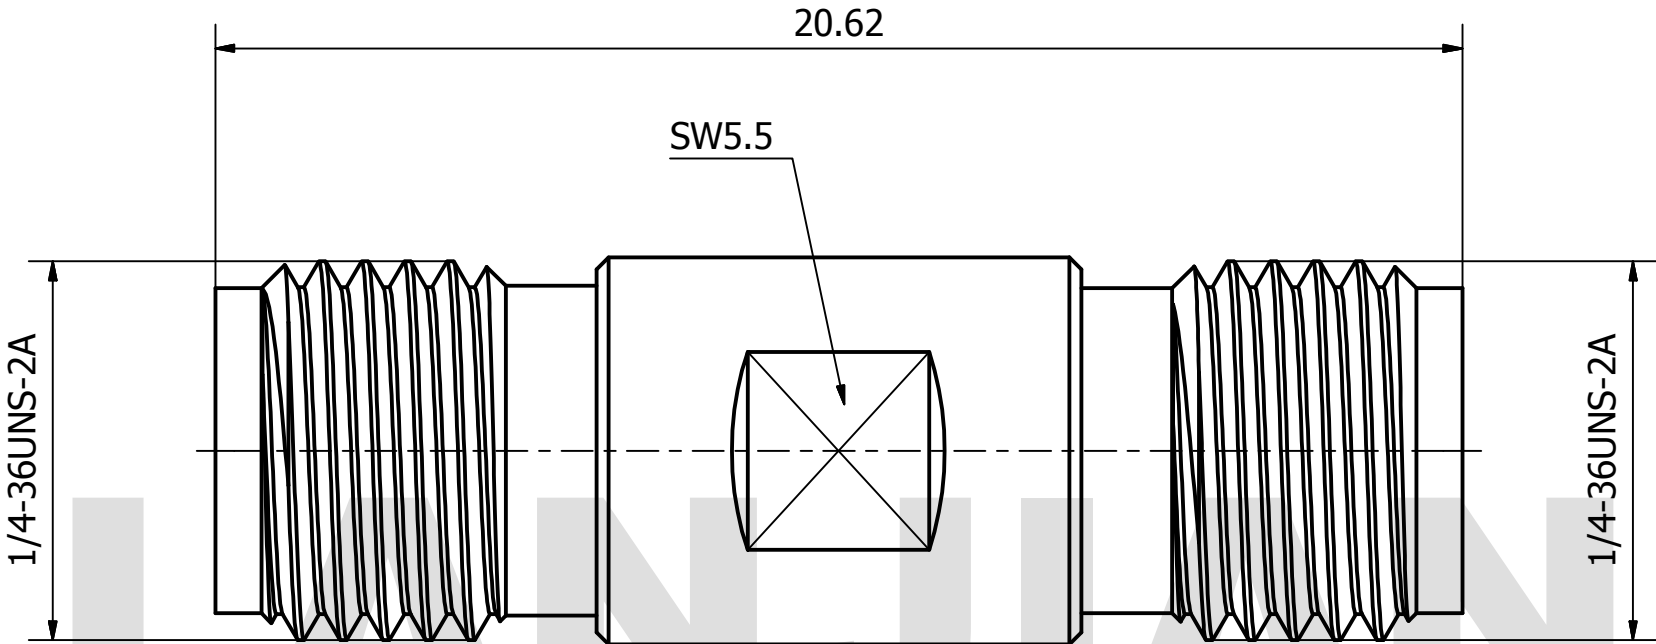

MATERIAL:
BODY: STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300
CONTACT: BERYLLIUM COPPER PER ASTM B196.
ALLOY NO. UNS C17300
INSULATOR: PEI/PTFE

PERFORMANCE:
IMPEDANCE: 50 OHMS
FREQUENCY: DC TO 26.5 GHz
VSWR: ≤1.20

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL :			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM			
TOLERANCES :			
X.X	± 0.20	ANGULAR : ± 1°	DEBURR AND BREAK SHARP EDGES
X.XX	± 0.10	FILLETS R/C : ± 0.10	
X.XXX	± 0.01	SURFACE FINISH : Ra 1.6	
	NAME	DATE	SIGNATURE
DRAWN	YaoJiang	01/02/2019	
CHK'D	HongZhongYan	01/02/2019	
APPV'D	HongZhongYan	01/02/2019	
MFG			
PROJECTION		SIZE	SCALE
		A3	8 : 1

LANJIAN ELECTRONICS

38 Hengtong Road, Xinqu Dingmao
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE

2.92/SMA-KK straight adaptor

DWG No.

GCPZ3.640.C.041

REV.

A

DO NOT SCALE THE DRAWING

PAGE 1 / 1